
PROPOSED SEWER LINE ABOVE EXISTING WATER MAIN WITH 18" MINIMUM SEPARATION.

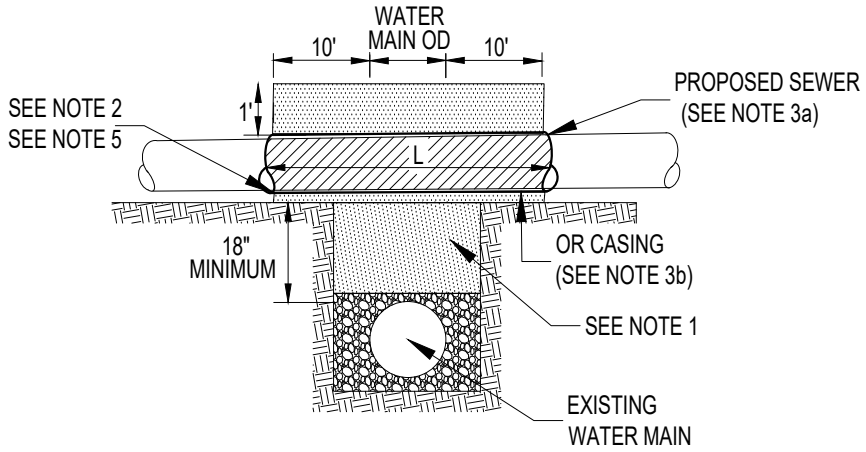

NOTES


1. IF THE SELECT GRANULAR BACKFILL EXISTS; REMOVE WITHIN WIDTH OF PROPOSED SEWER TRENCH AND REPLACE WITH SELECT EXCAVATED MATERIAL (CLASS IV) AND COMPACT.
2. OMIT SELECT GRANULAR CRADLE AND GRANULAR BACKFILL TO ONE (1) FOOT OVER TOP OF THE WATER MAIN AND USE SELECT EXCAVATED MATERIAL (CLASS IV) AND COMPACT OVER LENGTH "L".

3a. CONSTRUCT "L" FEET OF PROPOSED SEWER OF WATER MAIN MATERIAL AND PRESSURE TEST, OR

3b. USE CASING LENGTH "L" FOR PROPOSED SEWER AND SEAL ENDS OF CASING. SEE UW-14 FOR CASING DETAILS.

4. POINT LOADS SHALL NOT BE ALLOWED BETWEEN SEWER OR SEWER CASING AND WATER MAIN.
5. PROVIDE ADEQUATE SUPPORT FOR EXISTING WATER MAIN TO PREVENT DAMAGE DUE TO SETTLEMENT OF SEWER TRENCH.

PROPOSED WATER MAIN ABOVE EXISTING SEWER LINE WITH LESS THAN 18" SEPARATION.

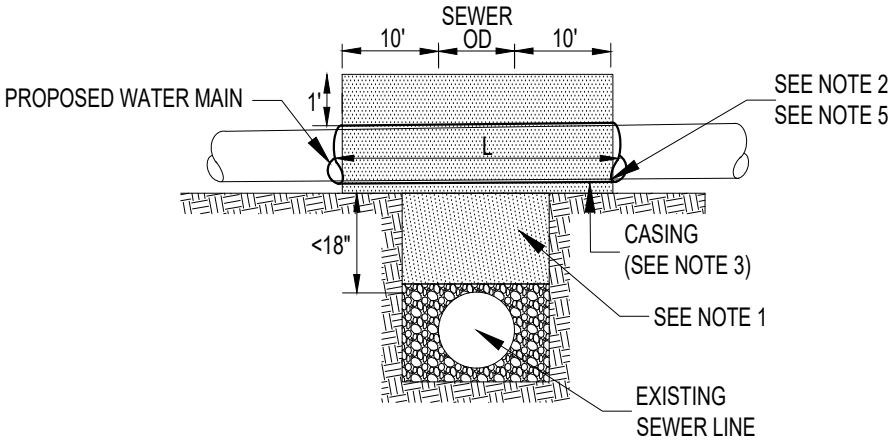

NOTES

1. IF THE SELECT GRANULAR BACKFILL EXISTS; REMOVE WITHIN WIDTH OF PROPOSED SEWER TRENCH AND REPLACE WITH SELECT EXCAVATED MATERIAL (CLASS IV) AND COMPACT.
2. OMIT SELECT GRANULAR CRADLE AND GRANULAR BACKFILL TO ONE (1) FOOT OVER THE TOP OF THE WATER MAIN AND USE SELECT EXCAVATED MATERIAL (CLASS IV) AND COMPACT OVER LENGTH "L".
3. USE A CASING PIPE FOR PROPOSED WATER MAIN AND SEAL ENDS OF CASING. SEE UW-14 FOR CASING DETAILS.
4. POINT LOADS SHALL NOT BE ALLOWED BETWEEN SEWER OR SEWER CASING AND WATER MAIN.
5. PROVIDE ADEQUATE SUPPORT FOR EXISTING SEWER LINE TO PREVENT DAMAGE DUE TO SETTLEMENT OF WATER MAIN TRENCH.

ADDITIONAL NOTES:

**THE REQUIREMENTS ON THIS DETAIL ARE TAKEN FROM THE STANDARD SPECIFICATIONS FOR WATER AND SEWER MAIN CONSTRUCTION IN ILLINOIS, CURRENT EDITION*

CLASS IV MATERIAL TO BE COMPACTED TO 95% OF STANDARD PROCTOR MAXIMUM DENSITY

OUTER DIAMETER = OD

Revised:	Drawing Name	Drawing Number	
1. 06/12/2015	WATER AND SEWER SEPARATION REQUIREMENTS	UG-04a	
2. 8/30/2021 KL - SEWER AND WATER 2014 UPDATE		Date: 04/15/2007	
3.		Drawn: EM	Checked: AW
4.			

City of Crystal Lake Illinois